

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 July 2003 (17.07.2003)

PCT

(10) International Publication Number
WO 03/057938 A1

(51) International Patent Classification⁷: **C22C 49/00**,
B22F 7/06, C22C 47/06, E21B 10/56

(21) International Application Number: PCT/IB03/00030

(22) International Filing Date: 9 January 2003 (09.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02/0220 10 January 2002 (10.01.2002) ZA

(71) Applicant (for all designated States except US): **ELEMENT SIX (PTY) LTD** [ZA/ZA]; Debid Road, Nuffield, 1559 Springs (ZA).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **TANK, Klaus** [ZA/ZA]; 9 Warbleton Avenue, Essexwold, 2007 Bedfordview (ZA).

(74) Agents: **KEMP, Mark** et al.; Spoor and Fisher, P.O. Box 41312, 2024 Craighall (ZA).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF MAKING A TOOL COMPONENT

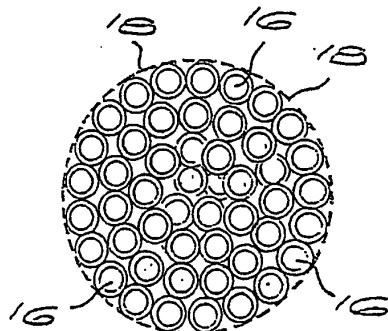

(57) Abstract: In a method of producing a tool component a plurality of fibres is formed into a bundle. Each fibre has a core comprising a mass of ultra-hard abrasive particles or precursor to said ultra-hard abrasive particles and optionally a second phase, and a coating comprising a mixture of carbide particles and particulate binder metal. After extruding the bundle of fibres, the bundle is severed transverse to its length to produce a layer 24. The layer 24 is placed on a surface 26 of a substrate 28 and the layer 24 and substrate 28 are subjected to elevated temperature and pressure conditions at which the ultra-hard abrasive particles are crystallographically stable. The composition of the core and coating may be interchanged in the method.

WO 03/057938 A1

- 1 -

METHOD OF MAKING A TOOL COMPONENT

BACKGROUND OF THE INVENTION

This invention relates to a method of making a tool component.

Tool components utilising diamond compacts, also known as PCD, and cubic boron nitride compacts, also known as PCBN, are extensively used in drilling, milling, cutting and other such abrasive applications. The tool component will generally comprise a layer of PCD or PCBN bonded to a support, generally a cemented carbide support. The PCD or PCBN layer may present a sharp cutting edge or point or a cutting or abrasive surface.

United States Patent 6,063,502 describes a material useful for producing the abrasive layer of a tool component. The material comprises a first structural phase comprising a hard material selected from the group consisting of cemented carbide materials, PCD, PCBN and mixtures thereof, and a second structural phase comprising a material that is different to that used to form the first structural phase, the second structural phase being in contact with at least a portion of the first structural phase. The material includes repeated structural units, disposed across a working surface of the material, each unit comprising an ordered micro-structure of the first and second structural phases. In use, this material is applied to a surface of a substrate and then bonded to that substrate.

- 2 -

This United States patent describes various methods of producing the material. One such method comprises producing a plurality of fibres having a core of the first structural phase and a coating of the second structural phase, orienting the fibres parallel to a common axis and then extruding them into a rod. The extruded rod can be cut into a desired geometry for the tool component or sliced to form a cutting surface for placement on to a substrate.

SUMMARY OF THE INVENTION

According to the present invention, a method of producing a tool component includes the steps of:

- (1) providing a plurality of fibres, each fibre having a core comprising a mass of ultra-hard abrasive particles or precursor to said ultra-hard abrasive particles and optionally a second phase, and a coating comprising a mixture of carbide particles and particulate binder metal,
- (2) producing a bundle of the fibres,
- (3) severing the bundle transverse to its length to produce a layer,
- (4) placing the layer on a surface of a substrate, and
- (5) subjecting the layer and substrate to elevated temperature and pressure conditions at which the ultra-hard abrasive particles are crystallographically stable.

The composition of the core and coating may be interchanged in the method described above. Such a method forms another aspect of the invention.

- 3 -

BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1 to 6 illustrate schematically steps in an embodiment of the invention.

DESCRIPTION OF EMBODIMENTS

In accordance with the method of producing a tool component of the invention a plurality of fibres is provided, each fibre having a core which is coated. For convenience, the invention will be described with reference to the core consisting of a mass of ultra-hard particles or precursor to said ultra-hard abrasive particles and the coating consisting of carbide particles and particulate binder metal. It is to be understood that the components of the core and coating may be interchanged.

A bundle is formed of the fibres, which is then severed transverse to its length to produce a layer. The layer is then applied to a surface of a substrate, whereafter the layer and substrate are subjected to conditions of elevated temperature and pressure at which the ultra-hard abrasive particles are crystallographically stable.

The product which is produced is a tool component comprising the substrate having a working portion produced from the layer bonded to a surface thereof. The working portion comprises a composite material comprising essentially a honeycomb structure of cemented carbide and abrasive compact material within the pores of the honeycomb structure and bonded to the honeycomb structure. The pores of the honeycomb structure may be ordered or random.

The ultra-hard abrasive particles will generally be diamond or cubic boron nitride. Thus, the abrasive compact which is produced in the pores of the

- 4 -

honeycomb structure will preferably be PCD or PCBN. That PCD or PCBN will preferably contain a second phase which will typically be a solvent/catalyst for the ultra-hard abrasive particles.

The particulate components of the core and coating of the fibres will preferably be in bonded form using a bonding agent such as an organic binder. An example of a particularly suitable binder is methyl cellulose. Generally, this binder will be removed, e.g. by heating, prior to subjecting the substrate and layer to the elevated temperature and pressure conditions.

The carbide particles of the coating will typically be tungsten carbide particles, tantalum carbide particles or molybdenum carbide particles. The metal binder may be any metal binder known in the art such as iron, nickel, cobalt or an alloy containing one or more of these metals.

The coating may comprise one or more layers. In the case that the coating comprises more than one layer, each layer will differ from the adjacent layer or layers in physical and/or chemical properties. For example, a particular layer of the coating may contain coarser or finer carbide particles than the adjacent layer or layers. Alternatively, or additionally, a particular layer may contain a different metal binder to that in the layer or layers to which it is adjacent.

The layer which is applied to a surface of the substrate is in a green state form. As such, it has a flexibility and may be applied to surfaces which are flat or profiled, e.g. a curved surface. The layer may be moulded into a shape complimentary to the substrate to which it is to be bonded.

The substrate will typically be a cemented carbide substrate.

An embodiment of the invention will now be described with reference to the accompanying drawings. Referring first to Figure 1, there is shown a fibre

- 5 -

comprising a core 10 and a coating 12. The core 10 comprises a mixture of diamond particles and a diamond solvent/catalyst, in particulate form, bonded into coherent form by means of an organic binder. The coating 12 comprises a mixture of carbide particles and metal binder, in particulate form, again bonded into coherent form by means of an organic binder.

The fibre of Figure 1 is reduced in cross-section by extruding it through nozzle 14 (see Figure 2). A plurality of the fibres 16 extruded through nozzle 14 form a bundle 18. The bundle 18 is then further extruded through nozzle 14 as shown in Figure 4. The extruded product is a rod 20 comprising the fibres 16 pressed into each other, as shown in Figure 5. This rod 20 may then be severed in a direction transverse to its length, as shown by the dotted lines 22. The severed piece or layer 24 may be removed. Thus, the layer 24, which has flexibility, may be placed on the curved surface 26 of a substrate 28, as shown in section by Figure 6.

The green state product of Figure 6 is placed in a suitable capsule for insertion into the reaction zone of a conventional high temperature/high pressure apparatus. The organic binder is first removed by heating the capsule to drive off the binder. The capsule is then placed in the reaction zone and the contents of the capsule subjected to diamond synthesis conditions. Typically, the pressure applied will be of the order of 4 to 8 GPa and the temperature will be of the order of 1300°C to 1700°C. This has the effect of producing PCD out of the material of core 10 and cemented carbide out of the material of coating 12. The PCD will be bonded to the cemented carbide. The layer 24 will be bonded to the surface 26 of the substrate 28 producing a working portion for the tool component. The working portion will have a honeycomb structure, similar to that shown by Figure 6, of cemented carbide and PCD within the pores of the honeycomb structure.

- 6 -

Although not present in this embodiment, if desired, an interlayer may be provided between the layer 24 and the surface 26 of the substrate 28. Such an interlayer would be selected to provide intermediate properties for stress management at the interface between the layer 24 and the substrate surface 26.

- 7 -

CLAIMS:

1. A method of producing a tool component including the steps of:
 - (1) providing a plurality of fibres, each fibre having a core comprising a mass of ultra-hard abrasive particles or precursor to said ultra-hard abrasive particles and optionally a second phase, and a coating comprising a mixture of carbide particles and particulate binder metal,
 - (2) producing a bundle of the fibres,
 - (3) severing the bundle transverse to its length to produce a layer,
 - (4) placing the layer on a surface of a substrate, and
 - (5) subjecting the layer and substrate to elevated temperature and pressure conditions at which the ultra-hard abrasive particles are crystallographically stable.
2. A method according to claim 1, wherein the bundle of fibres is extruded prior to being severed to produce the layer.
3. A method according to claim 1 or claim 2, wherein the core comprises a mixture of diamond or cubic boron nitride particles and an appropriate solvent/catalyst, in particulate form, bonded into a coherent form by means of an organic binder.
4. A method according to any one of the preceding claims, wherein the coating is bonded into a coherent form by means of an organic binder.
5. A method according to any one of the preceding claims, wherein the carbide particles are tungsten carbide particles, tantalum carbide particles or molybdenum carbide particles.


- 8 -

6. A method according to any one of the preceding claims, wherein the substrate is a cemented carbide substrate.
7. A method according to any one of the preceding claims, wherein the coating comprises one or more layers.
8. A method according to claim 7, wherein the coating comprises more than one layer, each layer differing from an adjacent layer in physical and/or chemical properties.
9. A method according to claim 8, wherein one layer has coarser or finer carbide particles than the adjacent layer(s) or contains a different metal binder to that in the adjacent layer(s).
10. A method according to any one of the preceding claims, wherein the tool component comprising the substrate has a working portion produced from the layer bonded to a surface thereof.
11. A method according to claim 10, wherein the working portion comprises a composite material comprising essentially a honeycomb structure of cemented carbide and abrasive compact material within the pores of the honeycomb structure and bonded to the honeycomb structure.
12. A method according to claim 11, wherein the pores of the honeycomb structure are ordered or random.
13. A method of producing a tool component including the steps of:
 - (1) providing a plurality of fibres, each fibre having a core comprising a mixture of carbide particles and particulate binder metal, and a coating comprising a mass of ultra-hard abrasive

- 9 -

particles or precursor to said ultra-hard abrasive particles and optionally a second phase,

- (2) producing a bundle of the fibres,
- (3) severing the bundle transverse to its length to produce a layer,
- (4) placing the layer on a surface of a substrate, and
- (5) subjecting the layer and substrate to elevated temperature and pressure conditions at which the ultra-hard abrasive particles are crystallographically stable.

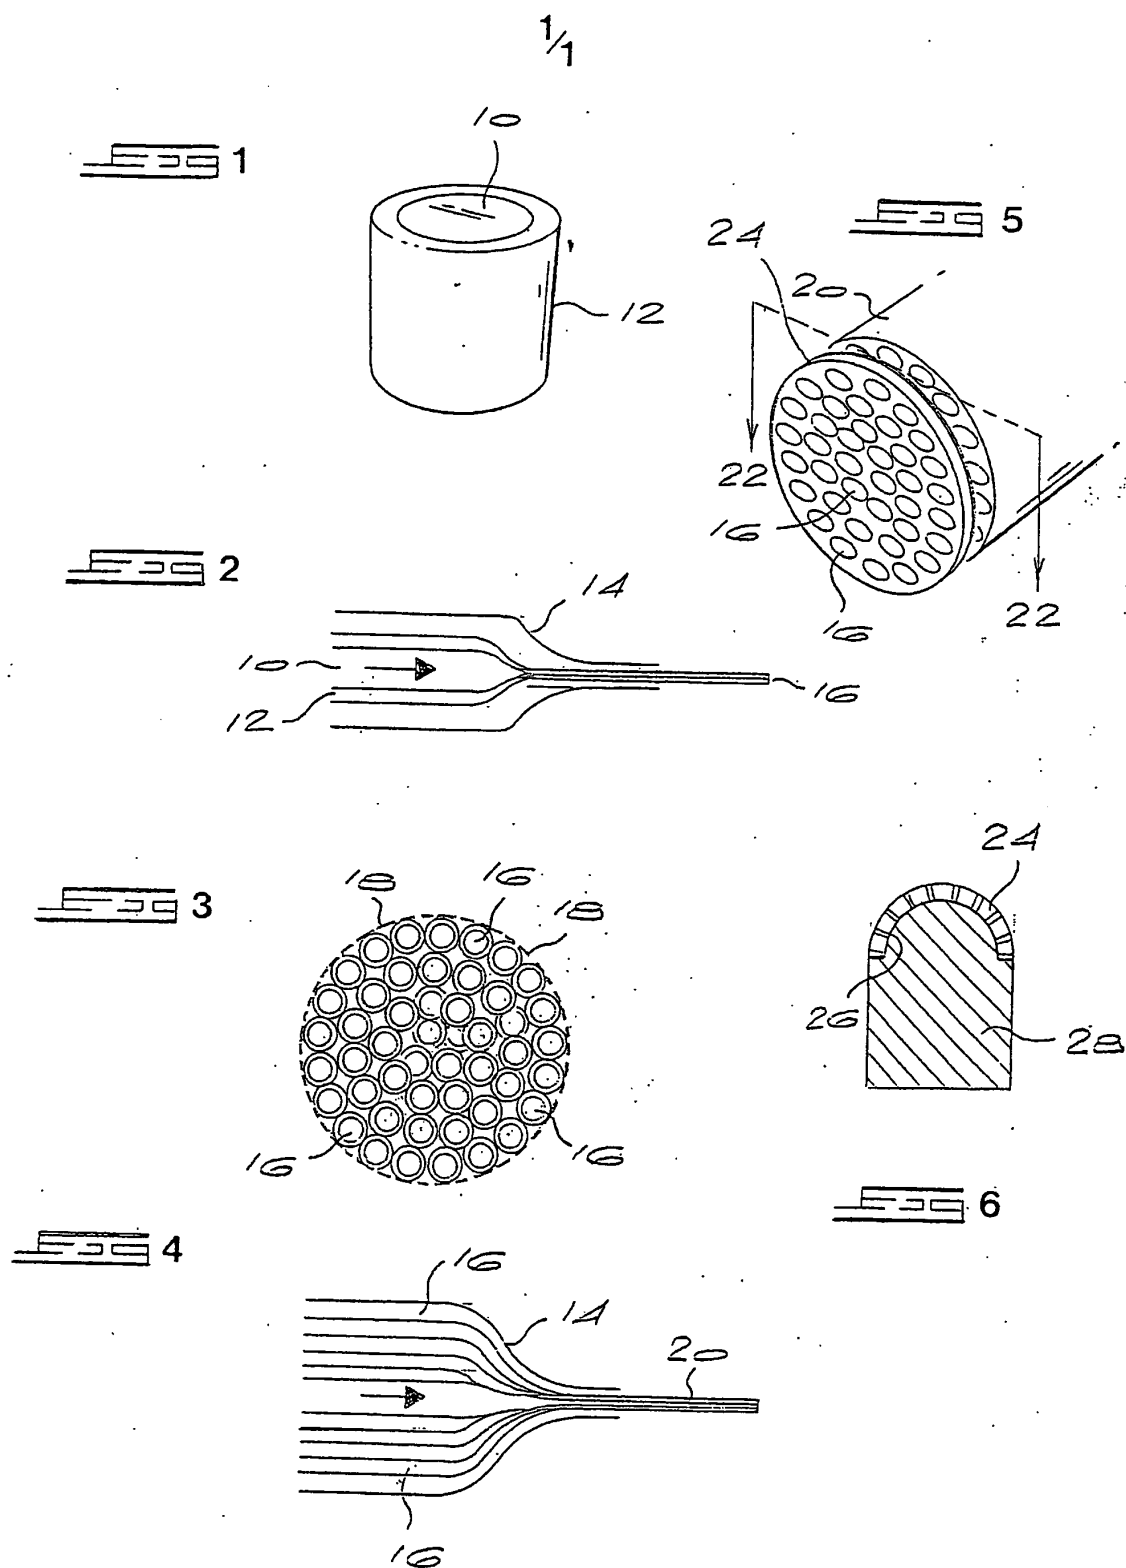

INTERNATIONAL SEARCH REPORT

Int onal Application No
PCT/IB 03/00030

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C22C49/00 B22F7/06 C22C47/06 E21B10/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C22C B22F E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, COMPENDEX, INSPEC, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 063 502 A (RAI GHANSHYAM ET AL) 16 May 2000 (2000-05-16) cited in the application column 6, line 55 -column 7, line 58; examples 2,3	1-13
A	MC DONOUGH WJ: "Flaw tolerant, fracture resistant, non-brittle materials produced via conventional powder processing" MATERIALS TECHNOLOGY, vol. 10, no. 7-8, July 1995 (1995-07) - August 1995 (1995-08), pages 131-134, XP009006526 the whole document	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

27 February 2003

Date of mailing of the international search report

10/03/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Alvazzi Delfrate, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Patent Application No.

PCT/IB 03/00030

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6063502	A	16-05-2000	US 2003008160 A1	09-01-2003
			US 6361873 B1	26-03-2002
			US 6451442 B1	17-09-2002
			US 2002020564 A1	21-02-2002
			AU 695577 B2	13-08-1998
			AU 3245897 A	05-02-1998
			CA 2212276 A1	01-02-1998
			GB 2354262 A ,B	21-03-2001
			GB 2315778 A ,B	11-02-1998
			SE 9702846 A	02-02-1998
			SG 68627 A1	16-11-1999
			ZA 9706883 A	11-02-1998
<hr/>				